

UNM STL 1000-10-270 C H835001

Product Information Sheet



Technical data	H835001
Suction capacity	1000 l/min
Eff. Delivery quantity	790 l/min
Start-up- / switch-off pressure	8/10 bar
Cylinder / Stages	2/2
Tank volume	270 l
Voltage	400 Volt/50 Hz
Drive power	5.5 kW
Speed	995 min ⁻¹
Noise	82 dB(A)
Dimensions (WxDxH)	1620 x 555 x 1285 mm
Air outlet	¾"
Weight	238 kg

Product Description

- Stationary compressor with star-delta switch with integral motor protection and low voltage circuit breaker which ensure a high degree of operating safety
- Compressor for work up to 10 bar
- Smooth running belt driven 2-cylinder unit with 2-stage compression
- Suitable for many jobs in the professional field
- Applications:
Expansion of compressed air systems,
Increase reliability
- Highest quality of installed components

UNM STL 1000-10-270 C H835001

Product Information Sheet



Quiet running and optimal cooling

due to the new wedge-driven compressor unit with optimal cooling air flow and improved delivery performance

Reduced noise level

Less noise from new unit

Space-saving design


Small footprints thanks to optimal arrangement of the components

Compressor with low speed of rotation

Reduced vibrations preserve the compressor components

Long service life

guaranteed by 15-year warranty against rust-through of vessel

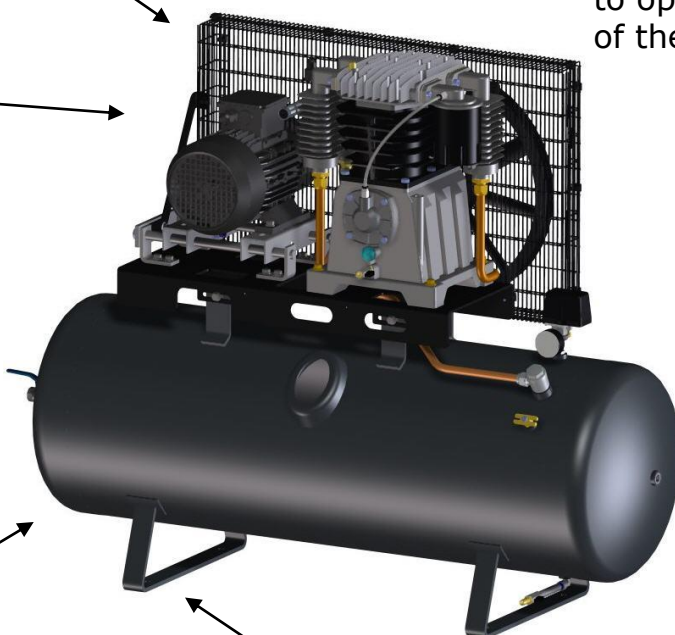

Motionless standing position

Standard features include: anti vibration rubber feet

Further information

Complete equipment

Pressure switch, motor protection, safety and check valve, container pressure gauge, unloaded start

Scope of delivery

Instruction manual

Warranty

- 12 months for professional industrial use
- 24 months for private use only